



## Automated Fuel Management at the Pump


**FLOWrangler** meets NEMA 1, 2, 4, 4X, 12, 13 and IP65 ratings. Enclosure is UL listed and tested to UL508-4X requirements.

### System Requirements:

- Windows XP, Vista, -7 or -8
- 32- or 64-bit processor
- Excel<sup>®</sup>, Dossier or other popular business programs capable of reading a CSV file

### Features:

- Supports over 1,200 users
- Supports Key, Keyless or combination of Key with required data inputs
- Key List will work in multiple yards
- Available in 12-volt DC *upon request*

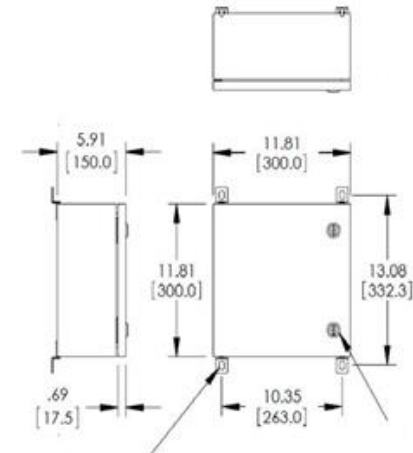

### Environmental: FuelKeys

Operating Temperature	-40 to 185 degrees F
Storage Temperature	-40 to 185 degrees F
Humidity	5% to 100%
Power Requirements	110-VAC
Maximum Current	1.2 amps
Warranty	1 Year

Sales@DataPakTX.com

Call 817-927-2151

www.datapaktx.com